


SMARTank by  **SkyBitz**

Wireless Tank Monitors

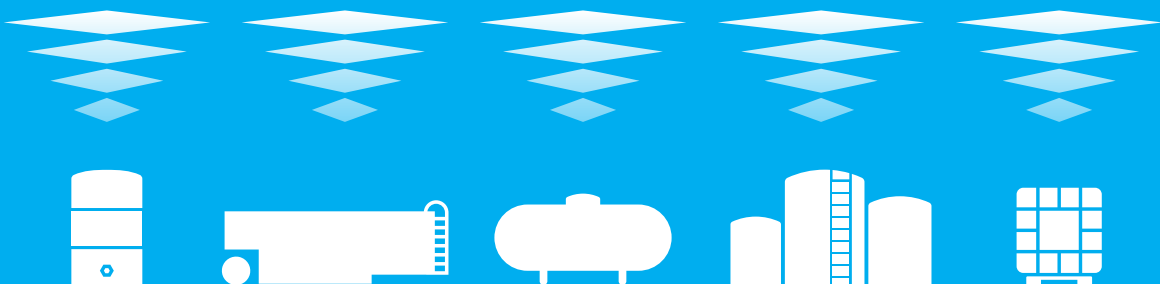

SMARTank Solutions for All Your Monitoring Needs

SMARTank ST90 Host Petroleum

- Works with above ground tanks up to 53 feet tall.
- Combines SMARTank's unique "multi-tank architecture" with a differential pressure sensor and polyurethane cable.
- Receive level readings for as many as thirty two (32) additional client monitors within 300 feet.

Petroleum and Chemicals



SMARTank ST90 Client

- Can be paired with any type host monitor within 300 feet.
- Easily configurable and comes with internal antennae, differential pressure sensor, and polyurethane cable.
- Ideal choice for above ground tanks for applications up to 53 ft tall.

Petroleum and Chemicals



SMARTank ST90 Host Totes

- Low profile, with internal antennae for monitoring stackable totes.
- Integrated GPS technology for tracking portable assets.
- 55" polyurethane cable with differential pressure sensor.

Petroleum, DEF, and Chemical Totes



SMARTank ST90 Host Chemical

- Recommended for chemical products.
- Teflon or Poly-U cable, and stainless steel or ceramic differential pressure sensor for corrosive chemicals.
- Receive level readings for as many as thirty two (32) additional client monitors within 300 feet.

Non-Corrosive and Corrosive Chemicals



SMARTank Foresight

- Powered multi-tank inventory monitoring solution – 900MHz, four (4) inputs, local display.
- Supports up to ten (10) clients, and up to four (4) wired connections.
- Displays local inventory information for multiple connected tanks.

Multi-Tank Solution



SMARTank Host Propane

- Host with magnetic mount for metal tanks.
- Hall effect sensor assembly sold separately.
- Can accept level readings from up to ten (10) additional client monitors within 150 feet.
- Integral barrier and Class 1, Div 1 gauge meet NFPA recommendations.

Propane and Gasoline



SMARTank Client Propane

- Can be paired to any type host monitor within 150 feet.
- Integral barrier and Class 1, Div 1 gauge meet NFPA recommendations.
- Ideal choice for above ground multi-tanks for propane or gasoline applications.

Propane and Gasoline



SMARTank Host Uplink 4-20mA

- Cost effective solution for monitoring above ground tanks.
- Completely wireless and connects with any existing 4-20mA sensor to deliver data using digital cellular technology.
- WLAN support for up to ten (10) client devices.

Uplink for Existing Sensors



I-Safe SMARTank TL95

- Intrinsically safe for use in Class 1, Div 1, Group D hazardous locations with vented and unvented tanks.
- Available in CPVC dual sensor or stainless steel enclosure for enhanced chemical compatibility.
- Integrated GPS functionality for precise asset location.

Class 1, Division 1



SMARTank UST Plus

- SMARTank UST Plus with serial cable.
- Designed to interface with multiple types of UST controllers.
- Pulls tank information from UST controllers and transmits data to the SMARTank website.

Underground Storage Tanks



062016RevB

We make your tanks **talk.**



SkyBitz Tank Monitoring provides remote monitoring and analytics for storing liquids and compressed gases in the petroleum, chemical, water and agriculture industries. Suppliers, distributors, and production managers optimize their operating efficiency through wireless tank monitoring and receive a rapid ROI based upon reduced tank servicing costs and improved inventory management.

Our advanced wireless tank monitoring system gives you the ability to know who needs product – when, where and how much.